

Full 960H Real Time DVR



KEY FEATURES

960x480 (960x576) resolution record with much better image quality than D1, providing a true life aspect ratio

HDMI output resolution 1080p display

Support HDMI & VGA & Composite output of Full HD (1920X1080 progressive) resolution.

SMART Function

Self monitoring Analysis and Reporting Technology.

Expendable storage via e-SATA connect

Smart Phone Application

Support each application for Iphone, Android, Blackberry.

Powerful CMS


Max.1024 camera monitoring

Event Map with pop window



| Model | CX-5004 | CX-5008 | CX-5016 |
|-----------------------|---|------------|--------------------------|
| Compression | H.264 | | |
| Operating System | Embedded Linux | | |
| Video Input | 4ch | 9ch | 16ch |
| Video Output | HDMI / VGA / Composite | | |
| Record Resolution | 960x480, 960x240, 480x240 (NTSC) 960X576, 960X288, 480X288 (PAL) | | |
| Audio | 4 Input (RCA), 1ch Line out (G723.1) | | |
| Alarm | 4ch, NC/NO Selectable | | |
| Record Frame | 120/100fps | 240/200fps | 240/200fps 480/400fps |
| Search | Date & Time, Calendar, Event, Backup Search | | |
| | Zoom in specific area by mouse drag | | |
| | x1, x2, x4, x8,x16,x32 playback speed | | |
| Storage | SATA HDD (up to 2) | | |
| Back up | USB / Network | | |
| Serial / USB | PTZ control, 2x USB, RS-232, RS-485 | | |
| Control Device | Keypad, Mouse, controller, Remote Controller | | |
| Network | 10/100/1000 Ethernet (RJ-45) | | |
| | Fixed IP , DHCP & DDNS | | |
| | Video Dual Stream | | |
| Remote Management | Built-in Web server for IE Browser | | |
| | Smartphone control | | |
| | CMS control | | |
| Etc | PTZ control by virtual joystick | | |
| | Backup Viewer Auto copy & AVI Export | | |
| Operating Temperature | 0°C~40°C | | |
| Operating Humidity | 20% ~ 80% | | |
| Power | 12V, 6.67A | | |
| Dimension | 358 mm(W) x 67 mm(H) x 335mm(D) | | |
| Weight | 3.5kgs | | |

Specification

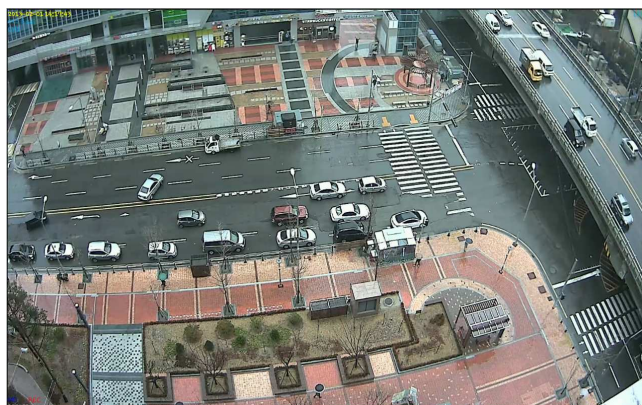

Playback Image