

960H(700TVL) HIGH RES TRUE DAY & NIGHT IR DOME CAMERA

SND-T3010E2812


SND-T3010E2812A

FEATURES




- High Density 1/3" Sony EX-view CCD(960H)
- 700TV Line
- 0.003Lux (F1.2@40IRE)
- D-WDR by ATR (Adaptive Tone Reproduction)
- 2DNR Noise Reduction
- Motion Detection
- Privacy Mask
- OSD menu
- CAMERA ID
- Enhanced sharpness compensation.
- Low noise and superior picture quality
- Video sub-out port for easy installation & maintenance
- 3-Axis Monut Bracket
- 30pcs of IR 850nm IR LED
- 12VDC, 12VDC/24VAC

DIMENSION

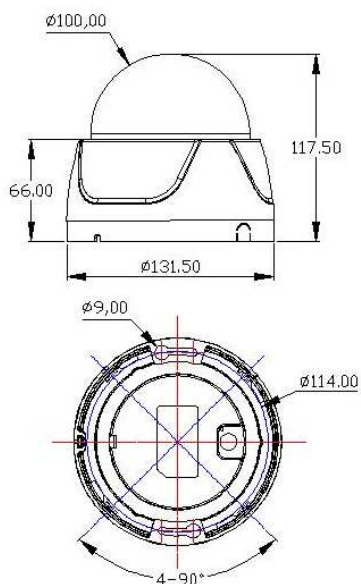

CABLE

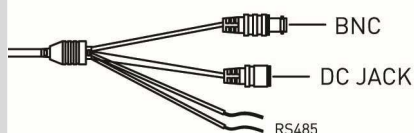

SPECIFICATION

ITEM	SND-T10E2812	SND-T10E2812A
Image Device	High Density 1/3" Sony EX-view (960H)	
Image Processor	Sony Effio DSP	
Effective Pixels	NTSC=976(H) x 494(V) / PAL=976(H) x 582(V)	
TV System	NTSC / PAL	
Scan Freq.	NTSC=59.94Hz(V), 15.734KHz(H) PAL=50Hz(V), 15.625KHz(H)	
Synchronization	Internal	
H. Resolution	700TVL	
Sensitivity	0.003Lux (F1.2@ 50IRE)	
S/N Ratio	More than 52dB with AGC OFF at 50IRE	
Electronic shutter	NTSC=1/60 ~ 1/100,000sec PAL=1/50 ~ 1/100,000sec	
White Balance	1900 ~ 10500°K Automatic tracking	
OSD	D-WDR, LSC, BLC, HSBL, Privacy Mask, Motion Detection, 2-DNR	
Video Output	VBS 1Vpp +/-10%, 75ohm	
Lens	2.8-12mm DC Drive Lens	
Day & Night	True Day & Night (ICR)	
Operating Power	DC 12V	12VDC/24VAC
Operating Condition	-20°C~+60°C / 10%~85%RH	
Dimension	100Ø x 131.5mm(W) x 117.5mm(H)	

Design and specifications are subject to change without notice.