

COLOR DOME CAMERA

DWC-540PV

**690TVL, WDR
True Day & Night, 3DNR**

Features


- Pixim 1/3" DPS Seawolf Chip Sensor
- High Resolution (up to 690 HTVL Effective)
- Best WDR (Wide Dynamic Range) Function
- 6 Privacy Zone, 4 Motion Detection zone (Built-in OSD (On Screen Display) Menu)
- Vari-Focal Auto iris zoom lens (2.8~10 mm) and Day & Night with ICR
- Dual mounting with flush and surface

Picture



In-Ceiling

Dimensions

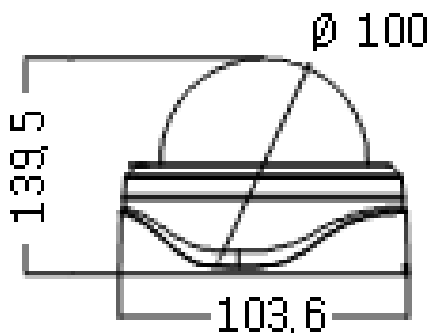

unit : mm

Specifications

MODEL	DWC-540PV
Image sensor	1/3" DPS Sensor (Pixim Seawolf)
Effective pixels	768(H) x 540 (V)
Horizontal resolution	Max. 690 HTVL Effective
Scanning frequency	15.734KHz(H), 59.944(V)
Signal system	NTSC / PAL
Minimum illumination	0.0008Lux Class sensitivity (0.002Lux with 2x Sens-up)
Day & Night	D&N Function by Digital Change : Auto / Off
Sharpness	Level 1~16
White balance	ATW NORMAL / ATW Desat / ATW Xtn / MANUAL
Back light	On / Off
DSS	Off / 2X, 4X, 8X, 16X, 32X, 64X ESS
DNR	On / Off
Digital Zoom	12x
Lens	2.8mm~10mm DC auto iris lens
Privacy Zone	On/Off(6 programmable zones)
Motion Detection	On/Off(4 programmable zones)
WDR Mode	Low / Middle / High / Custom
Privacy zones masking	6 Zones
Setup place	Indoo / Outdoor / Fluorescent / Custom
Camera ID	On / Off
S/N ratio	More than 50dB
Video output	Composite video output 75Ω terminated
OSD	Built-in
Sync. system	Internal
Operating humidity	30 % ~ 90 % RH
Operating temperature	- 10°C to 50°
Dimension	100(D)X103.6(H)mm
Weight	About 560g
Power consumption	200mA
Power supply	DC 12 V(10.2V~14.5 V) AC 24V (Option)